


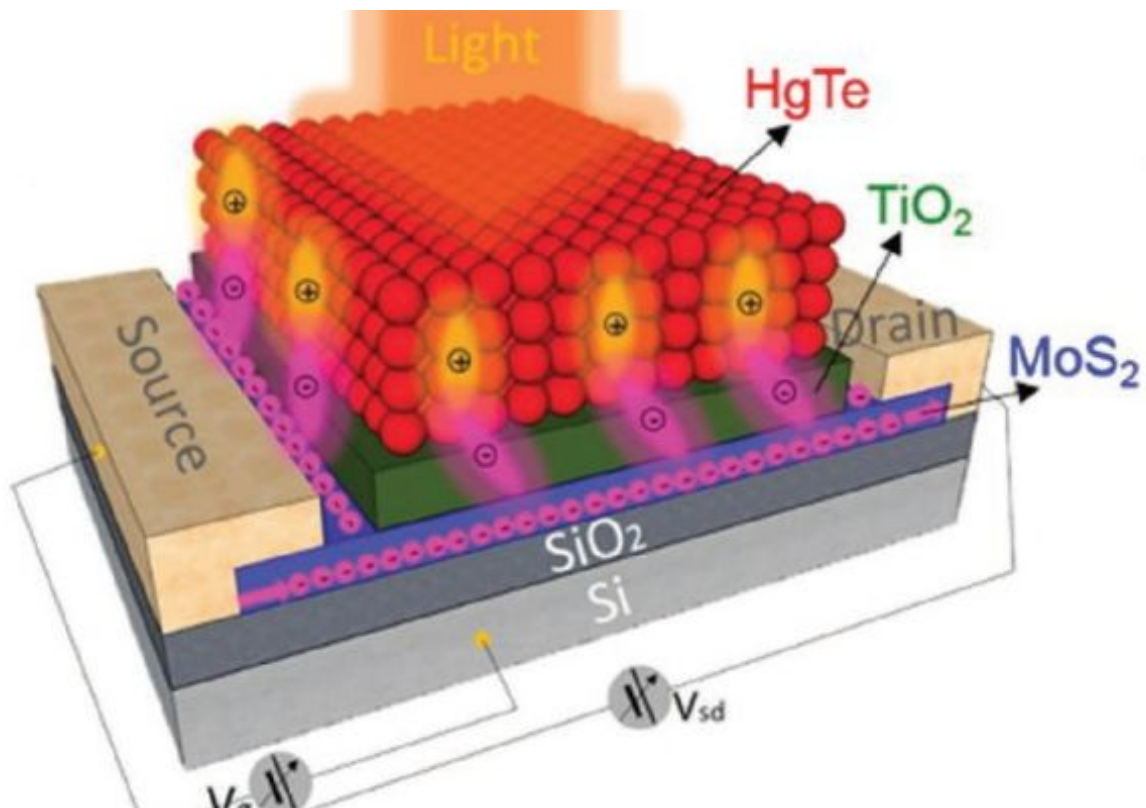

Quantum Dots and 2D materials for SWIR/Mid IR hybrid detectors

ICFO researchers develop an ultra-sensitive, broadband, low-cost hybrid MoS₂ - HgTe QD-based photodetector.

March 07, 2017

Optical sensing in the short-wave and mid- infrared is of paramount importance for a vast number of applications including surveillance, night vision, product, process and environmental monitoring and spectroscopy.

Yet existing technologies, particularly those that extend beyond 2 microns are very costly, non-integrated to CMOS electronics and most of them require thermoelectric cooling to reduce thermal noise. The culprit of this lies in the fact that those systems are based on photodiodes with maximum responsivity in the range of 1-4 A/W depending on their wavelength range.

In a recent paper, published in *Advanced Materials*, ICFO researchers Nengjie Huo, Shuchi Gupta led by ICREA Prof. at ICFO Gerasimos Konstantatos, demonstrate a new class of SWIR/Mid IR hybrid detectors that instead are based on CMOS compatible material platforms as top-surface detectors and combine synergistically the unique properties of two classes of materials. These two materials are, firstly, a 2-dimensional semiconducting transistor channel made of MoS₂ that demonstrates high carrier mobility and low off (dark) current and, secondly, the strong and tunable absorption of colloidal quantum dots.

For this study, HgTe colloidal quantum dots have been employed since they have demonstrated before to cover the full SWIR/mid-IR spectrum. The detectors exploit photo-generated charge transfer from the QD film to the MoS₂ channel to achieve for the first time a gain of about 1 million of circulated carriers per single incident photon for this class of QDs. This gain renders the hybrid detector highly responsive which together with the very low noise associated with the high bandgap and 2D-character of the MoS₂ has led to specific detectivities on the order of 10¹² Jones, two orders of magnitude higher than prior HgTe QD-based photodetectors and on par or better than currently employed, single-crystalline, costly detector technologies.

The outstanding performance of the detector has been achieved at room temperature, clearly confirming that the results obtained in this study are definitely paving the way for low cost, low footprint and low power consumption yet highly sensitive SWIR/mid-IR detectors.